

Customized FORM PTO-1390		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY DOCKET NO. P07058US00/DEJ	
<b>TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371</b>				U.S. APPLICATION NO. <b>09/744303</b> <small>(unknown serial number)</small>	
INTERNATIONAL APPLICATION NO. PCT/FR99/01803		INTERNATIONAL FILING DATE 22 JULY 1999		PRIORITY DATE CLAIMED 24 JULY 1998	
TITLE OF INVENTION: STANDBY REGULATOR FOR BREATHING SYSTEM					
APPLICANT(S) FOR DO/EO/US: MARTINEZ, Patrice et al.					
Applicant herewith submits to the US Designated/Elected Office (DO/EO/US) the following items and other information:					
<input checked="" type="checkbox"/> 1. This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371. <input type="checkbox"/> 2. This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 USC 371. <input checked="" type="checkbox"/> 3. This express request to begin national examination procedures (35 USC 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 USC 371(b) and PCT Art. 22 and 39(1). <input checked="" type="checkbox"/> 4. A proper Demand for International Preliminary Examination was made by the 19 <sup>th</sup> month from the earliest claimed priority date. <input checked="" type="checkbox"/> 5. A <b>copy</b> of the International Application as filed (35 U.S.C. 371 (c)(2)) <input type="checkbox"/> a. is transmitted herewith (required only if not transmitted by the International Bureau). <input checked="" type="checkbox"/> b. has been transmitted by the International Bureau. <input type="checkbox"/> c. is not required, as the application was filed in the United States Receiving Office (RO/US). <input checked="" type="checkbox"/> 6. A <b>translation</b> of the International Application into English (35 U.S.C. 371(c)(2)). <input checked="" type="checkbox"/> 7. Amendments to the claims of the International Appln. under PCT Article 19 (35 USC 371 (c)(3)) <input type="checkbox"/> a. are transmitted herewith (required only if not transmitted by the International Bureau). <input type="checkbox"/> b. have been transmitted by the International Bureau. <input type="checkbox"/> c. have not been made; however, the time limit for making such amendments had NOT expired. <input checked="" type="checkbox"/> d. have not been made and will not be made. <input type="checkbox"/> 8. A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). <input checked="" type="checkbox"/> 9. An <b>oath</b> or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). <input type="checkbox"/> 10. A translation of the annexes to the Int'l Prelim. Exam. Report under PCT Article 36 (35 U.S.C. 371(c)(5)). <b>Items 11. to 16. below concern document(s) or information included:</b> <input type="checkbox"/> 11. An <b>Information Disclosure Statement</b> under 37 C.F.R. 1.97 and 1.98. <input checked="" type="checkbox"/> 12. An <b>Assignment</b> document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. <input checked="" type="checkbox"/> 13. A <b>First preliminary amendment</b> . <input type="checkbox"/> A Second or subsequent preliminary amendment. <input type="checkbox"/> 14. A substitute specification. <input type="checkbox"/> 15. A change of power of attorney and/or address letter. <input type="checkbox"/> 16. Other items or information: <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> A copy of the Notification of Missing Requirements under 35 U.S.C. 371. <input type="checkbox"/> In the event that a petition for extension of time is required to be submitted herewith, and in the event that a separate petition does not accompany this response, applicant hereby petitions under 37 CFR 1.136(a) for an extension of time of as many months as are required to render this submission timely. Any fee is authorized in 17(c).					
Date: 23 January 2001					

U.S. APPLICATION NO. <i>(If known)</i> <b>09/744303</b>		INTERNATIONAL APPLICATION NO. PCT/FR99/01803		ATTORNEY DOCKET NO. P07058US00/DEJ	
<input checked="" type="checkbox"/> <b>17. The following fees are submitted:</b> <input checked="" type="checkbox"/> <b>Basic National Fee</b> (37 CFR 1.492 (a) (1)-(5): <div style="margin-left: 20px;"> <input type="checkbox"/> Neither Int'l Prelim. Exam. fee nor Int'l Search fee paid to USPTO \$1000  <input checked="" type="checkbox"/> Search Report has been prepared by the EPO or JPO \$ 860  <input type="checkbox"/> No Int'l Prelim. Ex. fee paid to USPTO but Int'l Search fee paid to USPTO \$ 710  <input type="checkbox"/> International preliminary examination fee paid to USPTPO \$ 690  <input type="checkbox"/> Int'l Prelim Ex. fee paid to USPTO &amp; all claims satisfied PCT Art. 33(1)-(4) \$ 100 </div>				<b>CALCULATIONS PTO USE ONLY</b>	
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$ 860	
<input type="checkbox"/> Surcharge of \$130 for furnishing the oath or declaration later than from the earliest claimed priority date (37 CFR 1.492(e)).				<input type="checkbox"/> 20 mos. \$ <input type="checkbox"/> 30 mos. +	
<b>CLAIMS</b>	<b>NUMBER FILED</b>	<b>NUMBER EXTRA</b>	<b>RATE</b>		
Total Claims	8 - 20 =		X \$18 =	\$	
Independent Claims	1 - 03 =		X \$80 =	\$	
<input type="checkbox"/> Multiple Dependent Claim(s) (if applicable)			+ \$270 =	\$	
TOTAL OF ABOVE CALCULATIONS =				\$ 860	
<input type="checkbox"/> Reduction of 1/2 for small entity status of applicant.				\$	
SUBTOTAL =				\$ 860	
<input type="checkbox"/> Processing fee of \$130 for furnishing the English translation later than from the earliest claimed priority date (37 CFR 1.492(f)).				<input type="checkbox"/> 20 mos. \$ <input type="checkbox"/> 30 mos. +	
TOTAL NATIONAL FEE =				\$ 860	
<input checked="" type="checkbox"/> Fee for recording the enclosed assignment, accompanied by a cover sheet - \$40 per property				\$ 40	
TOTAL FEES ENCLOSED =				\$ 900	
Amount to be				Refunded	\$
				Charged	\$
<input checked="" type="checkbox"/> a. A check in the amount of \$900.00 to cover the above fees is enclosed. <input type="checkbox"/> b. Please charge my Deposit Account No. 12-0555 in the amount of \$ to cover the above fees. <input checked="" type="checkbox"/> c. The Commissioner is hereby authorized to charge any additional fees required or credit overpayment to Deposit Account No. 12-0555.					
<b>Note:</b> Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status					
SEND ALL CORRESPONDENCE TO:  <b>Douglas E. Jackson</b>  At the address (below) of CUSTOMER NO. 00881.  <b>LARSON &amp; TAYLOR, PLC</b> <b>1199 NORTH FAIRFAX ST.</b> <b>SUITE 900</b> <b>ALEXANDRIA, VA 22314</b>			SIGNATURE: <u><i>Douglas E. Jackson</i></u>  NAME: Douglas E. Jackson  REG. NO.: 28518  PHONE NO.: 703-739-4900  Date: 23 January 2001		

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of )  
Patrice MARTINEZ et al. )  
 )  
New U.S. Patent Appln. )  
corr. to International )  
Appln. No. PCT/FR99/01803 )  
 )  
 )  
 )

Assignee: INTERTECHNIQUE

For: A DEMAND REGULATOR FOR A BREATHING SYSTEM

**PRELIMINARY AMENDMENT**

Assistant Commissioner for Patents  
Washington, D.C. 20231

S I R:

Prior to examination, please amend the application as follows:

IN THE SPECIFICATION:

Page 1, insert --BACKGROUND OF THE INVENTION-- after the  
title;

delete line 31 and insert:

--SUMMARY OF THE INVENTION

It is an object of the invention to provide--

Page 3, line 6, delete ", in which:" and insert a period;  
insert --BRIEF DESCRIPTION OF THE DRAWINGS--  
after line 6;

insert --DETAILED DESCRIPTION-- after line 18.

#### IN THE CLAIMS:

Delete claims 1-8 and insert claims 9-16 as follows:

--9/ A demand regulator comprising:

- communication means for feeding a tube for connection to an inside of a breathing mask with a pressurized breathing gas;
- means for supplying dilution air to the breathing gas;
- a breathe-out valve opening from said tube to atmosphere;
- a manually actuatable control member having a normal position causing operation without over pressure in the tube above atmosphere and with air dilution, and an emergency position causing the tube to be fed with said breathing gas at an over pressure; and
- means for preventing feed of over pressure gas to the tube so long as the mask is in stored.--

--10/ A demand regulator according to claim 9, wherein said demand regulator is mounted on said mask and said means for preventing over pressure gas feed to the tube comprise a valve responsive to doning of the mask on the face or to a mechanical pressure of the mask against the face.--

--11/ A regulator according to claim 9, wherein the communication means comprise:

a main valve defining a control chamber connected via a constriction to the admission and controlling communication between the inlet and the tube, and

a pilot valve which is actuated responsive to breathe-in suction in the tube and co-operates with a fixed seat for communicating the control chamber with a chamber which communicates with the inlet via a constriction.--

--12/ A regulator according to claim 10, wherein said valve is placed between the chamber and the atmosphere.--

--13/ A regulator according to claim 11, wherein said means for preventing operation are designed to cause high pressure feed when the manually actuatable control member is in the emergency position in response to a first intake of breath causing a gas pressure in the tube to drop below ambient pressure.--

--14/ A regulator according to claim 11, wherein said means for preventing operation are designed to cause the regulator to be fed in response to inflation of a pneumatic harness of a mask carrying the regulator.--

--15/ A regulator according to claim 13, wherein said means for preventing feed with over pressure comprise:

an additional valve controlled by a differential piston urged towards a position in which said additional valve cuts off the feed; and

a harness inflation and deflation cock having a rest position in which it connects an annular surface of the differential piston to atmosphere and an activated position in which it connects said annular surface to the inlet,

said piston having a first face with a larger area subjected to atmospheric pressure and a second face with a smaller area subjected to

the pressure downstream from the valve which acts in an opening direction.--

--16/ A regulator according to claim 9, wherein the means for preventing feed are carried by a mask storage box and said mask carries said regulator and said means for preventing feed are designed to retain the selection member in the normal position so long as the mask is in storage and to cause it to move into the emergency position when the mask is extracted from the box.--

#### IN THE ABSTRACT:

Please substitute the abstract of the PCT application with the abstract typed on the attached sheet.


#### REMARKS

The changes are made for better compliance with U.S. PTO practice and not in any way for overcoming references.

An early and favorable action allowing claims 9-16 is respectfully requested.

Respectfully submitted,

Date: 1/23/01

By:   
Douglas E. Jackson  
Reg. No. 28518

## ABSTRACT OF THE DISCLOSURE

The demand regulator has a duct communicating a pressurized breathing gas admission with a tube connected to the inside of a breathing mask. Dilution air may be added to the breathing gas. A breathe-out valve opens from the tube to atmosphere. A manual control member has a normal position causing operation without an over pressure above atmosphere and with dilution and an emergency position causing the tube to be fed with pure breathing gas (typically oxygen) at high pressure. Operation with over pressure gas feed is prevented mechanically or pneumatically so long as the mask is being stored.

## A DEMAND REGULATOR FOR A BREATHING SYSTEM

Breathing protection systems for the crew of aircraft likely to fly at high altitude include a regulator for feeding a breathing mask from a source of pressurized breathing gas (generally oxygen). The regulator can be carried by the mask or it can be mounted on the seat of the crew member.

Usually, such regulators include two selector members made available to the user:

10       · a button for switching between normal and 100%, thereby enabling the mask to be fed with breathing gas that is diluted with air or else with pure gas; and

      · an "emergency" button which, when activated from a rest position, causes the mask to be fed at high pressure.

15       The user thus has four possible operating states available:

      1) normal, for use against insufficient oxygen;

      2) 100%, rarely used, except for improving night vision;

20       3) normal in "emergency" mode, which should be avoided since the high pressure would give rise to a continuous leak through the air inlet; and

      4) 100% in "emergency" mode for protecting the wearer against smoke and toxic gas by means of the high pressure which opposes ingress of air and/or depressurization of the environment at high altitude.

25       The inventors have found that it suffices, in fact, to have only states 1 and 4 available, state 4 being able to replace state 2 without drawback, particularly since state 2 is little used.

30       Consequently, the invention seeks to provide a simple type of demand regulator that nevertheless satisfies all requirements.

      To this end, the invention provides in particular a demand regulator comprising:



· communication means for putting an admission designed to be connected to a source of pressurized breathing gas into communication with a tube designed to be connected to the inside of a breathing mask;

5       · means for delivering dilution air to the breathing gas;

· a valve for breathing out from inside the mask to the atmosphere;

10       · a manual control member having a normal position giving rise to operation without high pressure and with dilution, and an emergency position giving rise to the inside of the mask being fed with pure breathing gas at high pressure; and

15       · means for preventing operation with pressurized gas feed so long as the mask is in a storage position.

The last disposition is to prevent the mask being stored while operating at high pressure. Under such circumstances, the mask would be fed continuously from the source, and the source would rapidly be depleted.

20       The means enabling the last function to be performed are advantageously designed so that the mask can be stored (or must necessarily be stored) with the manual control member in the emergency position. This improves safety, since the crew member is supplied with pure breathing gas at high pressure as soon as the mask is put on the face. The same result can be obtained, when the demand regulator is mounted on the mask, by providing its storage box with means that bring the manual control member into the normal position when the mask is stored and that bring it into the emergency position when the mask is extracted.

30       Other dispositions enable a comparable result to be obtained, e.g. by detecting: that the mask has been taken from its storage box; that the mask has been applied to the face; the mask is forcibly applied to the face; or a harness

holding the mask on the face is tensioned, etc. The means used can be mechanical, electrical, or electronic.

The above characteristics and others will appear more clearly on reading the following description of particular  
 5 embodiments, given as non-limiting examples. The description refers to the accompanying drawings, in which:

- Figure 1 is a sketch of a demand regulator carried by a breathing mask and constituting a particular embodiment, the figure not being drawn to scale for greater clarity;
- 10 • Figure 2, similar to a fraction of Figure 1, shows a modified embodiment;
- Figures 3 and 4, likewise similar to fractions of Figure 1 show other variants;
- Figure 5, still similar to Figure 1, shows an  
 15 embodiment that can be used when the demand regulator is fitted with an inflatable retention system; and
- Figure 6, likewise similar to Figure 1, shows yet another embodiment.

The demand regulator whose general structure is shown  
 20 in Figure 1 comprises a housing 10 made up of a plurality of assembled-together pieces, having an admission 12 for connection to a source of pressurized breathing gas, e.g. constituted by a cylinder of oxygen underpressure or a liquid oxygen converter. The housing also has a tube 14 for  
 25 connection with the inside of a breathing mask (not shown) carrying the regulator.

The housing 10 contains a main valve 16 constituted by a diaphragm co-operating with a fixed seat. A control chamber 18 defined by the rear surface of the main diaphragm  
 30 and the housing is connected via a constriction 20 to the admission. When it is subjected to admission pressure, the diaphragm 16 is pressed against the seat, closing the passage in said seat, and separating the admission 12 from the tube 14.

The pressure that exists in the chamber 18 is controlled by a pilot valve 22. The pilot valve comprises a diaphragm 24 that is sensitive to pressure. The diaphragm carries a shutter or closure member 26 which co-operates  
5 with a fixed seat to put the control chamber 18 into communication with a chamber 28 defined by the diaphragm 24, or to separate the chambers.

The chamber 28 also communicates with the admission via a constriction 29.

10 The pressure that exists inside the chamber 28 is limited by a valve 30 discharging to atmosphere and which prevents the high pressure in the chamber 28 exceeding a predetermined value.

To enable operation with dilution, an ejector 32 is  
15 interposed between the main valve 16 and the tube 14. When open, a passage 34 allows dilution air to arrive downstream from the ejector.

The pilot valve 22 is made in such a manner as to serve also as an exhaust valve. For this purpose, the diaphragm  
20 24 has an annular rim 36 which bears against a seat for exhausting to the atmosphere.

The disposition described above is known and it is used by numerous demand regulators, so its operation need not be described in detail.

25 To enable the invention to be implemented, the Figure 1 regulator includes a selector member 38 which is drawn in continuous lines in its "emergency" position and in dashed lines in its "normal" position. This selector member is guided on the housing 10 by means that are not shown.  
30 Advantageously, resilient retaining means, such as a ball urged by a spring serves to hold it in whichever position it has been moved manually.

The selector member 38 controls a dilution valve 40 which closes the passage 34 when the member 38 is in its

"emergency" position and opens it when the member is in its "normal" position.

5 The selector member 38 also controls a valve 42 which opens a passage for putting the chamber 28 into communication with the atmosphere when in the "normal" position, and for closing this passage when in the "emergency" position.

10 It is explained below that the elimination of any communication between the chamber 28 and the atmosphere causes the mask to be fed at a high pressure which is set by the rating of the valve 30. Consequently, except when the supply of pressurized breathing gas to the regulator is prevented by other means, the chamber 28 must remain connected to the atmosphere so long as the mask is not in  
15 use.

For this purpose, the regulator shown in Figure 1 has a valve 44 connecting the chamber 28 to the atmosphere, which valve is urged by a spring 46 towards an open position. The valve 44 is provided with a push rod 48 which projects from  
20 the housing 10 at rest. This push rod is designed to be pushed in and to close the valve 44 when the mask fitted with the regulator is placed on the face. The push rod can be designed to press against the face. It can also be placed in such a manner as to be pushed in when a harness  
25 that holds the mask against the face is under tension. The spring 48 can be rated either so that mere contact between the push rod 48 and the face suffices to close the valve, or else so that the valve 44 closes only when sufficient application force is exerted.

30 When the regulator is in its "normal" state it operates in conventional manner and that is why there is no need to describe such operation herein.

However, when the selection member 38 is in its "emergency" position, and the valve 44 is closed, then the  
35 regulator operates as follows.

Because the chamber 28 is separated from the atmosphere, the admission pressure tends to become established therein via the constriction 29. However, the pressure in the chamber 28 is limited by the atmospheric bleed valve 30 opening when the pressure reached in the chamber 28 is sufficient to open the pilot valve 22. The pressure in the control chamber 18 drops to a value fixed by the rating of the valve 30. The main valve 16 subjected to the difference in pressure between the admission and the pressure in the chamber 18 opens and feeds the tube 14 with pure breathing gas. The main valve 16 opens only when the pilot valve 22 closes under the effect of the increasing pressure inside the mask.

When the user breathes out, the annular rim 36 lifts off its seat and exhausts to the atmosphere.

The regulator does not discharge to atmosphere even when the selector member 30 is in its "emergency" position so long as the valve 44 remains open, and thus so long as the mask is not in place.

In the modified embodiment shown in Figure 2, the box 52 for receiving the mask is designed to bring and/or retain the selection member 30 into the "normal" position so long as the mask is in storage, and to cause it to pass into its "emergency" position when the mask is taken out.

For this purpose, the box has a resilient catch 54 and the selector member 38 has a stud 56. When the mask fitted with the regulator is pushed into the box in the direction of arrow f, the catch begins by pushing the member 38 to the left until it has been brought into its "normal" position, after which it snaps into position beyond the stud. When the mask is pulled out, the resilient catch 54 returns the member 38 to the "emergency" position before retracting.

The Figure 3 embodiment can be considered as having a push rod whose operation is the opposite to that of the rod of Figure 1. In Figure 3, where the members corresponding

to those of Figure 1 are given the same reference numerals, the valve 44a is urged by a spring 46a towards its open position. The push rod 48a is arranged to be pushed in and to open the valve 44a when the mask fitted with its  
 5 regulator is placed in the box 52a.

The embodiment shown in Figure 4 is particularly suitable for use when the regulator is mounted on the mask and is suitable for storage in a box. High pressure operation with the selector member 38 in the "emergency" position occurs in response to the first breathing causing  
 10 the pressure in the tube to drop below ambient pressure. The constriction 29 of Figure 1 is omitted.

When the admission 12 is fed and the selection member 38 is in the "emergency" position, while ambient pressure is  
 15 too low to open the valve 30, the main valve 16 remains closed. The chamber 28 is separated from the admission by the pilot valve 26 which is held closed by the spring 50. Admission pressure then exists in the chamber 18.

On first breathing in by the wearer of the mask, an  
 20 under pressure is established in the tube 14. The admission pressure then tends to become established in the chamber 28 and holds the pilot valve continuously open. Nevertheless, the pressure is limited by the continuously open pilot valve. Nevertheless, the pressure is limited by the  
 25 atmospheric bleed valve 30 to a value that is low enough for the main valve to remain open and high enough for the main valve to remain likewise open.

When the regulator is in the "emergency" position, surrounding depressurization causes the valve 30 to open and  
 30 decreases the pressure in the chamber 18 to a level such that the main valve delivers gas continuously. To avoid this situation when the mask is not being worn, the mask is generally stored in a box:

which automatically brings it to the "normal"  
 35 position (Figure 2); or

which prevents it from being stored in the "emergency" position, e.g. by holding the mask at the entrance to the box when the selection member is in its "emergency" position.

5       The embodiment of Figure 5 is designed to be carried by a mask. It differs from that of Figure 1 in that its operation, even in the "emergency" position, depends on an inflation of a mask pneumatic harness, e.g. of the kind described in application FR 98/05949 or patent US-A-  
10   5 690 102.

The regulator proper has the same structure as that of Figure 1, except that it does not have the valve 44 which closes when the mask is pressed against the face. However, the housing 10 also contains a mechanism for inflating and  
15   adjusting the pressure in a harness 60 for retaining the mask.

The admission 12 of pressurized breathing gas is connected to the annular chamber situated beneath the diaphragm of the main valve only in response to a valve 62  
20   opening under the control of a differential piston 64. A spring 66 urges the piston 64 towards a position in which the valve 62 is pressed against its seat. Under such circumstances, the inability of the regulator to operate is due to its supply being cut off.

25       The larger surface of the piston 64 is subjected to atmospheric pressure and tends to close the valve 62. The smaller surface of the piston is subject to the pressure which exists downstream from the valve 62. The annular surface 68 constituted by the staged configuration of the  
30   piston is subjected to a pressure that is controlled by a cock for inflating and deflating the harness 60.

The cock can be of various structures. In Figure 5, a passage 72 is provided in the housing. The passage has a plunger 70 received therein which constitutes a double-  
35   acting shutter member. One end of the passage is connected

to the inlet for pressurized breathing gas. Its other end opens to atmosphere. A first O-ring carried by the plunger 70 bears against a cylindrical portion of the passage and separates the gas admission from the harness while the  
 5 plunger 70 is held by the admission pressure so as to bear against the control lug 74 while the lug is in its rest position. When the lug 74 is pushed in manually, it pushes the plunger to a position in which it puts the gas admission into communication with the harness. Simultaneously, the  
 10 displacement of the plunger brings a second O-ring 78 into contact with a frustoconical portion of the passage and separates the harness from the atmosphere.

A constricted passage 76 enables the pressure which exists inside the harness to be established also against the  
 15 annular surface 68.

When not in use, a mask fitted with the regulator shown in Figure 5 will normally be stored in a box that leaves the regulator projecting therefrom so that it can be seized. The box is provided with doors that open when the user pulls  
 20 on the mask. In general, the box is provided with a cock that is opened by the doors being opened. Nevertheless, such a cock is not essential.

Even if the member 38 is in its "emergency" position, the regulator does not deliver oxygen. The main valve is  
 25 not fed because the valve 62 is closed by the spring 66.

When the user of the mask pushes down the plunger 70 in order to inflate the harness, admission pressure becomes established progressively against the annular surface 68. The piston 64 rises and opens the valve 62. From this point  
 30 on, operation is the same as that of the Figure 1 embodiment when its valve 44 is closed.

When the user releases the plunger 70 in order to deflate the harness, the valve 62 does not close. The admission pressure then acting on the bottom face of the  
 35 piston 64 holds it in the high position.



Even if the valve 62 is open, the regulator no longer delivers when the mask is not pressed against the face and the member 38 is in the "normal" position.

5 The embodiment shown in Figure 6 has a regulator proper that differs from that shown in Figure 5 only by the absence of the constricted communication 20.

The regulator has underpressure controlled means which isolate the regulator proper from the admission, as in Figure 5, until an underpressure appears relative to ambient  
10 pressure inside the tube 14, i.e. the pressure reduction caused by first inspiration.

This first intake of breath causes the pressure in the tube to decrease and opens the pilot valve 22. Admission pressure then tends to become established inside the chamber  
15 ,28 and to hold the pilot valve 22 open. This pressure becomes established from the admission 12 via a constriction 84 and the connections via the command chamber 18.

Additional means are provided in the Figure 6  
20 configuration to slow down the opening of the main valve 16. These means comprise a piston 80 sliding in a bore of the housing and urged by a spring 82 towards a position in which it closes a stop valve 62 that prevents breathing gas from reaching the main valve. The timing elements further  
25 include a plunger 88 which slides in a bore 86 and has a structure comparable to that of the plunger 70 in Figure 5. One of the end faces of the plunger is subjected to the pressure that exists in a compartment connected to the admission via a constriction 90. The other end face of the  
30 plunger is subjected to atmospheric pressure when the plunger is in the rest position shown in Figure 6. This pressure is communicated to the upstream side of the valve 62 by a passage 94.

So long as the breathing gas pressure does not exist in  
35 the admission 12, the plunger 88 remains in the position

shown in Figure 6. Once said pressure is established, e.g. because a cock has been opened under the control of the doors of the storage box, then the pressure which acts on the end face of the piston increases progressively at a rate which is fixed by the constriction 90. The plunger 88 is pushed back progressively towards a position in which it separates the passage 94 from the atmosphere and puts it into communication with the admission. The valve 62 can then feed the main valve.

Once the plunger is in the position communicating the admission with the main valve, the plunger remains in that position. A push rod 96 can be provided to return to its rest position by action in the direction of arrow f1.

All of the embodiments described above operate in purely pneumatic manner. The invention can also be used in a regulator making use of sensors, solenoid valves, and/or piezoelectric actuators, e.g. of the kind described in document US-A-4 336 590 (French patent No. 79/11072) to which reference can be made.

More generally, the means for preventing operation with the mask being fed with pressurized gas so long as the mask is in a storage position can have a very wide variety of structures. If the regulator is carried by a mask, the means can be controlled by inflating the harness, by deflating the harness after inflation, by measuring forces on the harness, by measuring the force with which the mask is pressed against the face, by detecting the presence of the face. The means can be responsive to a first intake of breath giving rise to a vacuum in the mask after it has been put on the face. The means can prevent a mask fitted with a regulator from being stored in a box while it is in the "emergency" position. When the regulator is separate from the mask, a communication can be provided between the mask and the regulator to transmit reliable information to the

regulator. A disposition of the kind shown in Figure 6 can be used.

In any event, operation can be prevented by cutting off the feed upstream from the regulator, by cutting off the  
5 flow passing through the regulator, or by cutting off the high pressure, and the various solutions can be used in combination.

## CLAIMS

1/ A demand regulator comprising:

- communication means for putting a pressurized breathing gas admission (12) into communication with a tube (14) for connection to the inside of a breathing mask;
- means (34, 32) for supplying dilution air to the breathing gas;
- a breathe-out valve (36) opening from the tube to the atmosphere;
- a manual control member (38) having a normal position causing operation without over pressure above atmosphere and with dilution, and an emergency position causing the tube to be fed with pure breathing gas at an over pressure; and
- means for preventing operation with high pressure gas feed so long as the mask is in storage.

2/ A regulator according to claim 1, characterized in that the regulator is mounted on a mask and in that said means for preventing operation with high pressure gas feed to the tube are constituted by a valve (44) responsive to the mask being put into place on the face or to the pressure of the mask being applied against the face.

3/ A regulator according to claim 1, characterized in that the communication means comprise a main valve (16) defining a control chamber (18) connected via a constriction (20) to the admission and controlling communication between the admission (12) and the tube (14), and a pilot valve (22) responsive to breathe-in suction in the tube and co-operating with a fixed seat to put the control chamber (18) into communication with a chamber (28) which communicates with the admission via a constriction (29).

4/ A regulator according to claims 2 and 3, characterized in that said valve (44) is placed between the chamber (28) and the surrounding atmosphere.

5 5/ A regulator according to claim 3, characterized in that said means for preventing operation are designed to cause high pressure operation when the selector member 38 is in its "emergency" position in response to a first intake of breath causing the pressure in the tube to drop below  
10 ambient pressure.

6/ A regulator according to claim 3, characterized in that said means for preventing operation are designed to cause the regulator to be fed in response to inflation of a  
15 ,pneumatic harness of a mask carrying the regulator.

7/ A regulator according to claim 5, characterized in that said means for preventing operation comprise: a valve (62) controlled by a differential piston (64) urged towards a  
20 position in which the valve (62) cuts off the feed; and a harness inflation and deflation cock having a rest position in which it connects an annular surface (68) of the piston to the atmosphere and an activated position in which it connects said annular surface to the admission, the piston  
25 having a large face subjected to atmospheric pressure and a small face subjected to the pressure downstream from the valve (62) which acts in the opening direction.

8/ A regulator according to any preceding claim,  
30 characterized in that the means for preventing operation are carried by a storage box for a mask carrying the regulator and are designed to bring and/or retain the selection member (38) into or in the "normal" position so long as the mask is in storage and to cause it to move into the "emergency"  
35 position when the mask is extracted.

## A B S T R A C T

## A DEMAND REGULATOR FOR A BREATHING SYSTEM

5           The demand regulator comprises communication means for putting a pressurized breathing gas admission (12) into communication with a tube (14) for connection to the inside of a breathing mask, means (34, 32) for supplying dilution air to the breathing gas, and a breathe-out valve (36) opening from the tube to the atmosphere. In addition, a manual control member (38) has a normal position causing operation without high pressure and with dilution, and an emergency position causing the tube to be fed with pure breathing gas at high pressure. Mechanical or pneumatic means prevent operation with high pressure gas feed so long as the mask is being storage.

10

15

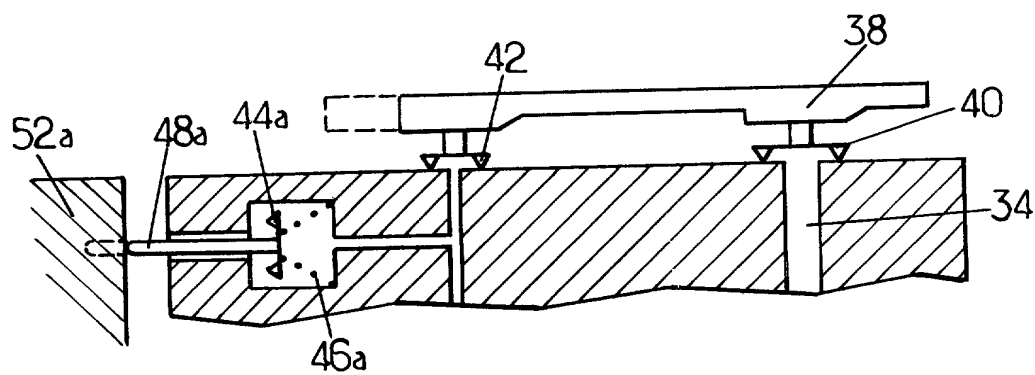
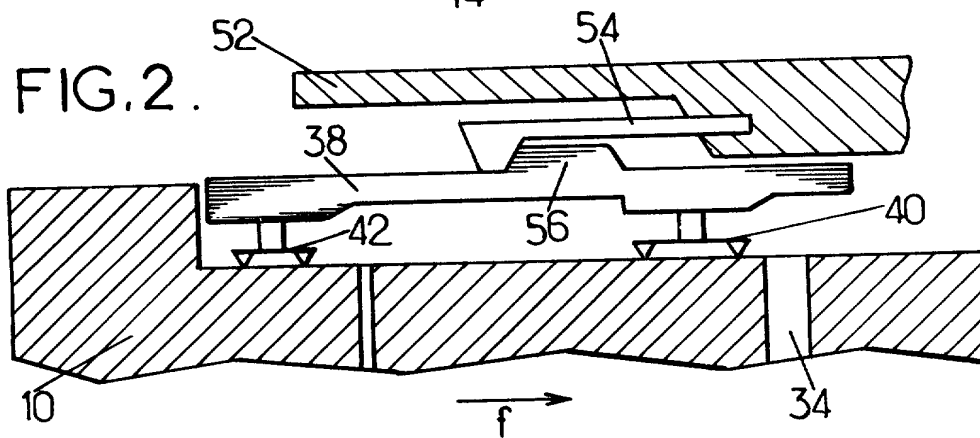
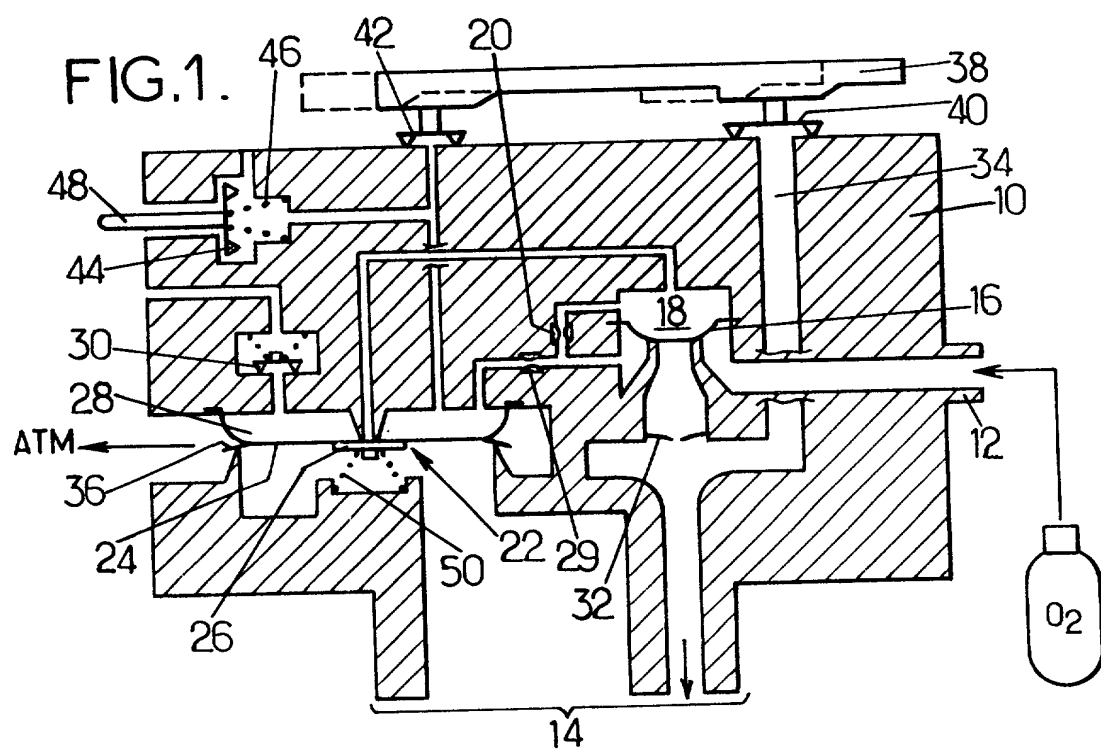
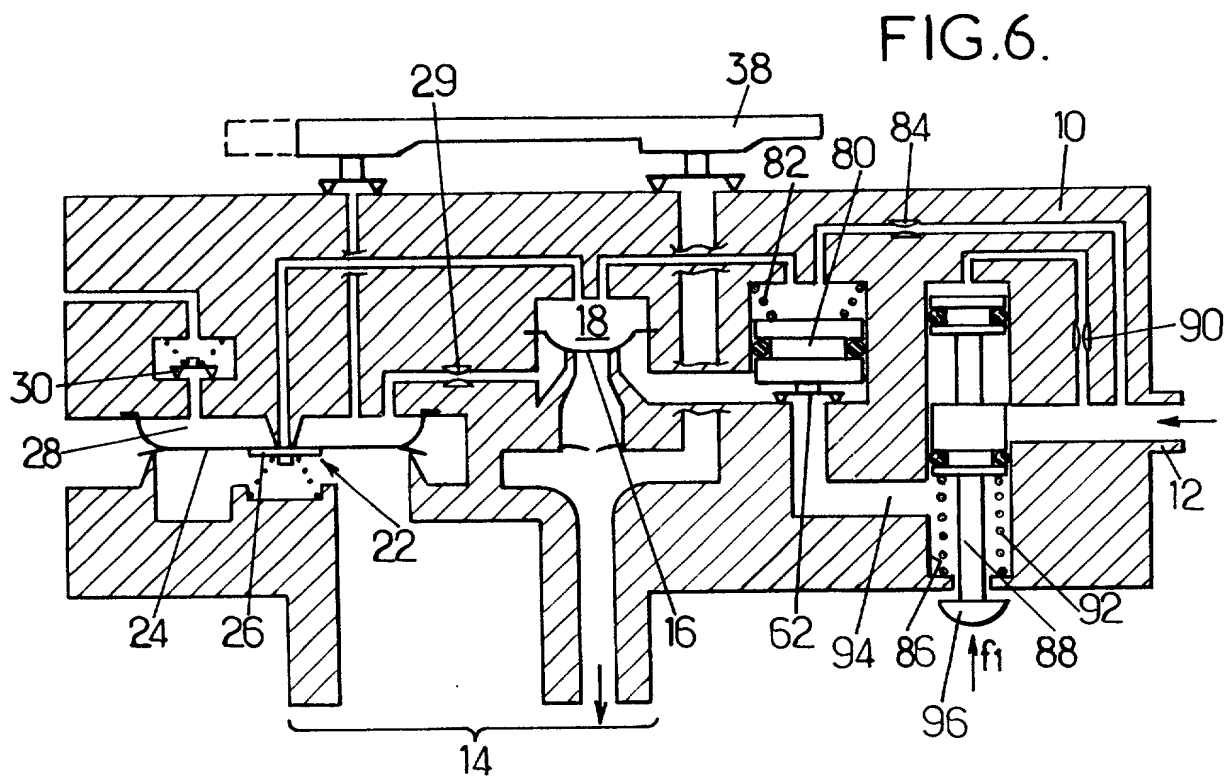
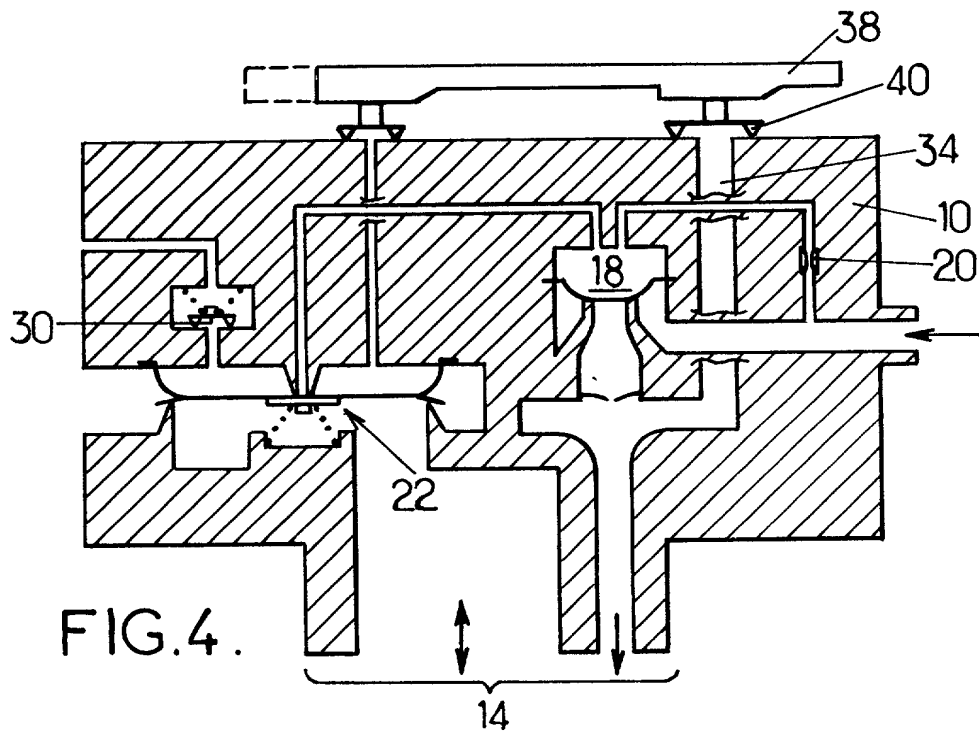


FIG.3.





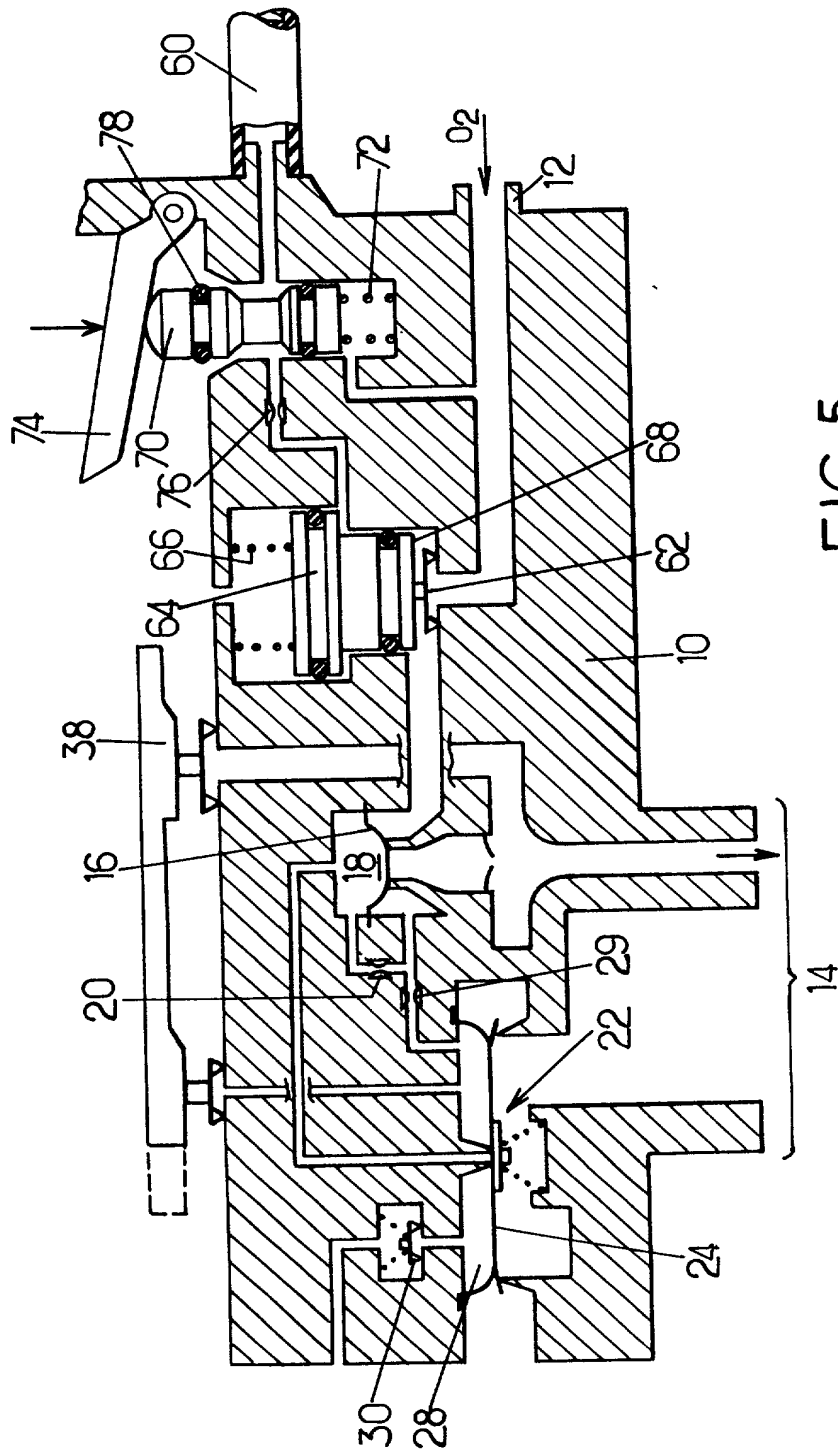


FIG. 5.

# DECLARATION FOR USA PATENT APPLICATION

(including Design and National Stage PCT)

Attorney's Docket ID: 1198

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below adjacent to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought

on the invention entitled: A DEMAND REGULATOR FOR A BREATHING SYSTEM.

the specification of which:

☒ is attached hereto.

(or)

was filed on \_\_\_\_\_ as U.S. Application No. or PCT International Application No. \_\_\_\_\_

and (if applicable) was amended on \_\_\_\_\_

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment specifically referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States of America, listed below and have also identified below, where priority is not claimed, any foreign application for patent or inventor's certificate, or any PCT International application, having a filing date before that of the application on which priority is claimed. ( ☐ ADDITIONAL APPLICATIONS IDENTIFIED ON ATTACHED SHEET )

Prior Foreign Application No.

98 09493

Country

FRANCE

Day/Month/Year Filed

24th July 1998

Priority Not Claimed

I hereby claim the benefit under 35 U.S.C. 120 of any U.S. application(s), or 365(c) of any PCT application designating the U.S., listed below; and insofar as the subject matter of each claims of this application is not disclosed in the prior U.S. or PCT application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT filing date of this application. ( ☐ ADDITIONAL APPLICATIONS IDENTIFIED ON ATTACHED SHEET )

U.S. or PCT Parent Application No.

FR99/01803

Parent Filing Date (Day/Month/Year)

22th July 1999

Parent Patent No. (if applicable)

As a named inventor, I hereby appoint the registered practitioners of **LARSON & TAYLOR** associated with Customer Number ~~000881~~ to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith. Direct all correspondence to that Customer Number.

Direct all telephone calls to \_\_\_\_\_  
at TEL (703) 739-4900 (Fax: 703-739-9577) e-mail: \_\_\_\_\_

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1000 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

SOLE OR FIRST INVENTOR		Citizenship
Given Name (first and middle (if any)) <u>Patrice</u>		<u>FRENCH</u>
Family Name or Surname <u>MARTINEZ</u>		
Full Post Office Address <u>14, rue du Pont Marquant - 78610 LE PERRAY EN YVELINES (FRANCE)</u> <i>FRX</i>		
Residence - City, State/Country (if different from PO address) <u>Same as above</u>		
SIGN AND DATE HERE Inventor's Signature <u>Patrice MARTINEZ</u> <i>[Signature]</i>		Date <u>15th November 2000</u>
SECOND JOINT INVENTOR (if any)		Citizenship
Given Name (first and middle (if any)) <u>Michel</u>		<u>FRENCH</u>
Family Name or Surname <u>BARDEL</u>		
Full Post Office Address <u>13, rue du Mercantour - 78310 MAUREPAS (FRANCE)</u> <i>FRX</i>		
Residence - City, State/Country (if different from PO address) <u>Same as above</u>		
SIGN AND DATE HERE Inventor's Signature <u>Michel BARDEL</u> <i>[Signature]</i>		Date <u>15th November 2000</u>
THIRD JOINT INVENTOR (if any)		Citizenship
Given Name (first and middle (if any))		
Family Name or Surname		
Full Post Office Address		
Residence - City, State/Country (if different from PO address)		
SIGN AND DATE HERE Inventor's Signature		Date
FOURTH JOINT INVENTOR (if any)		Citizenship
Given Name (first and middle (if any))		
Family Name or Surname		
Full Post Office Address		
Residence - City, State/Country (if different from PO address)		
SIGN AND DATE HERE Inventor's Signature		Date